



4XR 11

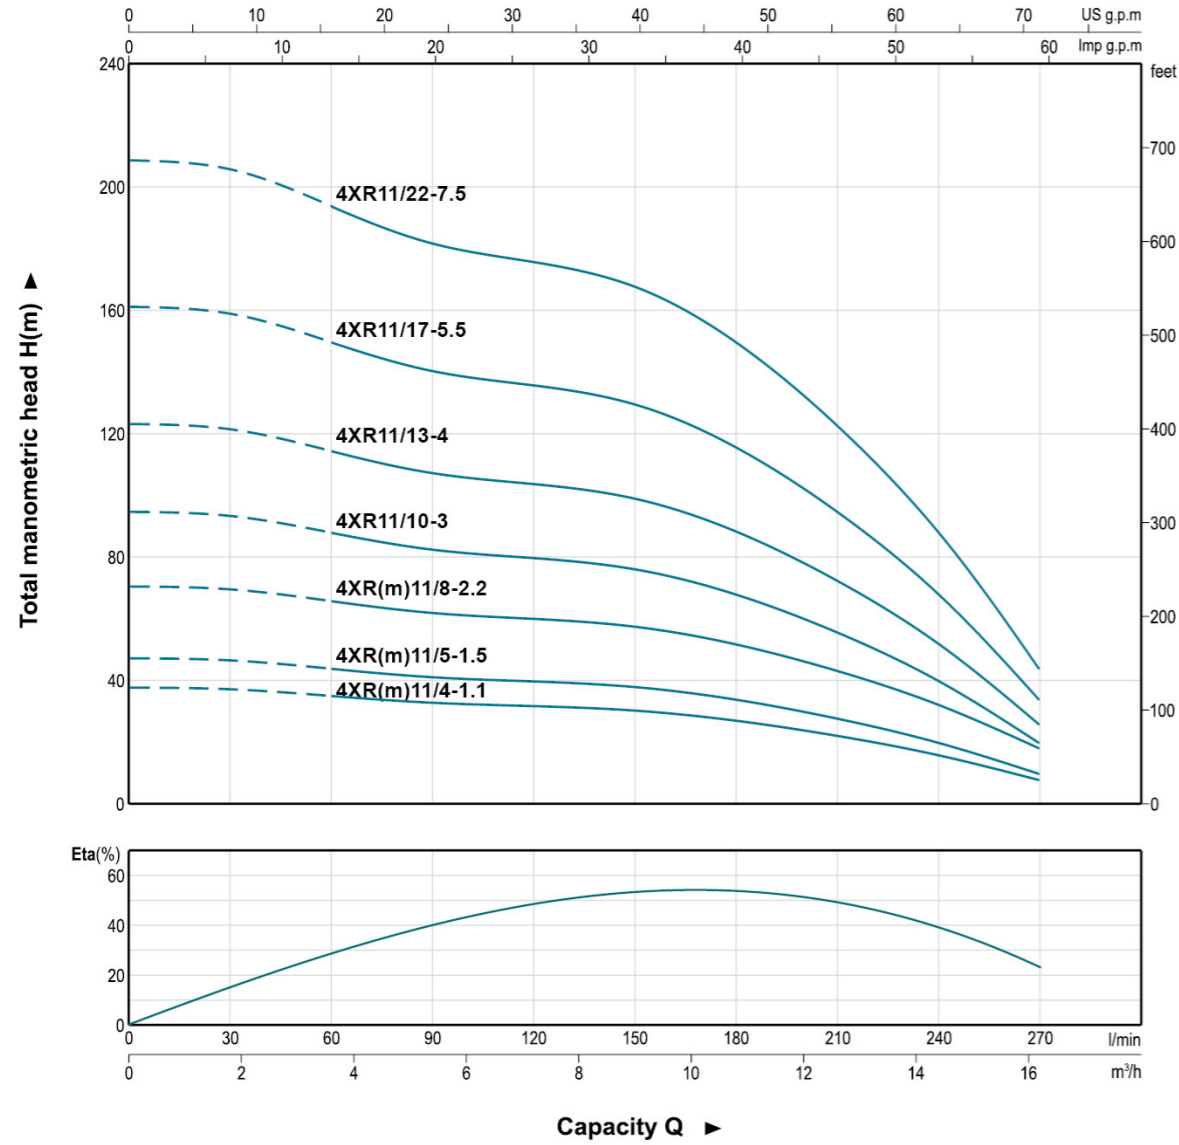

Technical Data

Model		Power		DELIVERY n≈3450 rpm													
1~ 110 - 220V	3~ 220 - 380V	kW	HP	H (m)													
				Q(m³/h)	0	1.8	3.6	5.4	7.2	9.0	10.8	12.6	14.4	16.2			
		Q(l/min)	0	30	60	90	120	150	180	210	240	270					
4XRm11/4-1.1	4XR11/4-1.1	1.1	1.5	38	38	35	33	32	31	27	22	16	8				
4XRm11/5-1.5	4XR11/5-1.5	1.5	2	48	47	44	41	40	38	34	28	20	10				
4XRm11/8-2.2	4XR11/8-2.2	2.2	3	76	75	71	66	64	61	55	45	32	16				
-	4XR11/10-3	3	4	95	94	88	83	80	76	68	56	40	20				
-	4XR11/13-4	4	5.5	124	122	115	108	104	99	89	73	53	26				
-	4XR11/17-5.5	5.5	7.5	162	160	150	141	136	130	116	95	69	34				
-	4XR11/22-7.5	7.5	10	209	207	194	182	176	168	150	123	89	44				

4XR 14

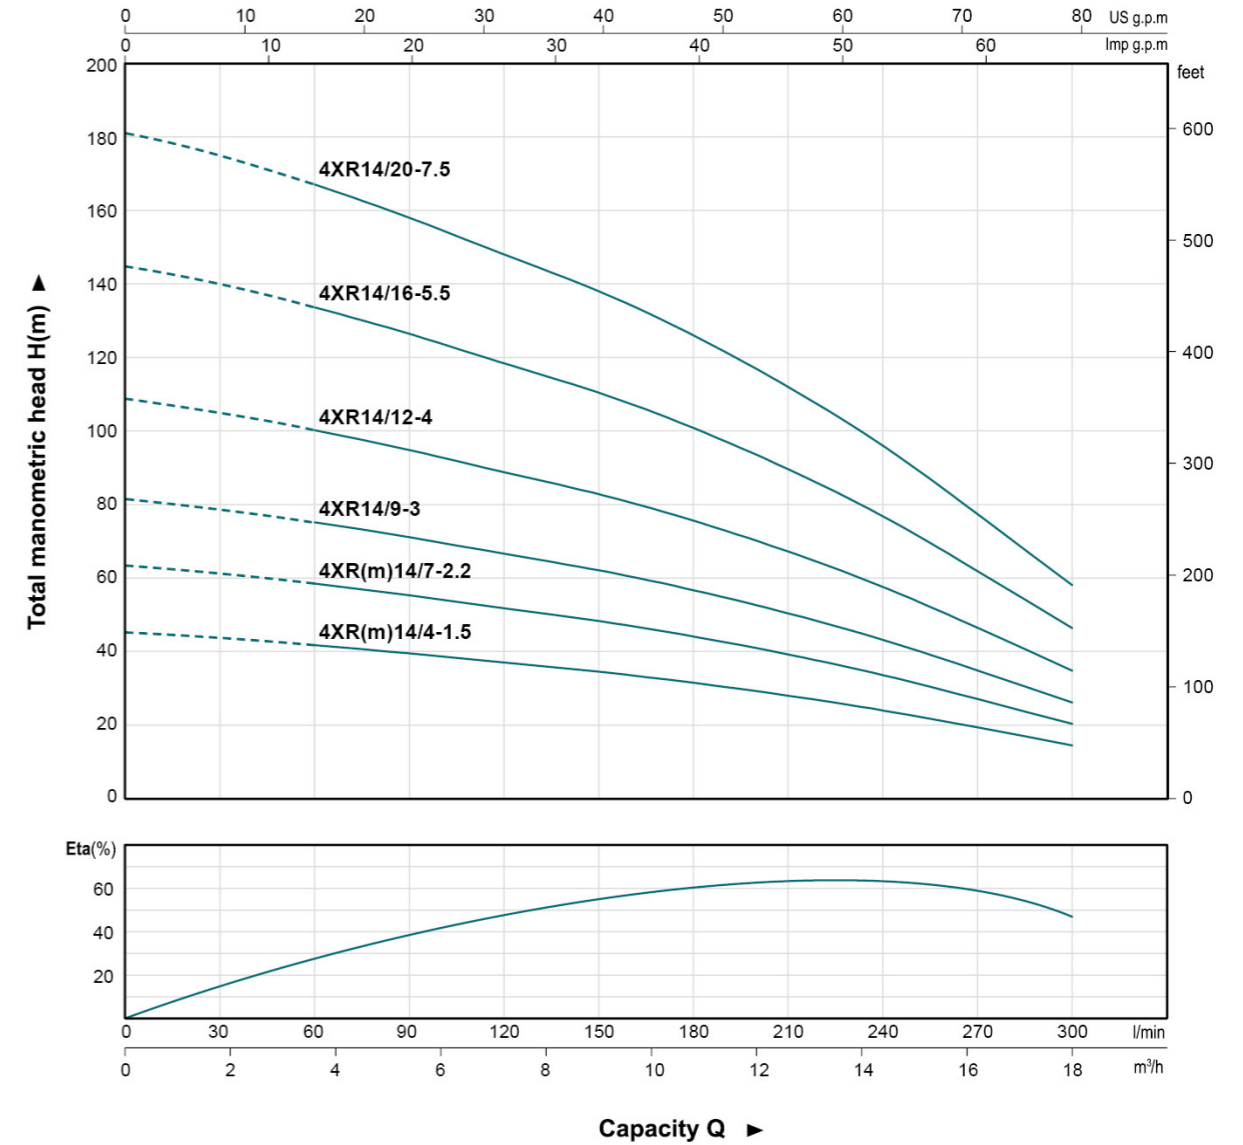

Technical Data

Model		Power		DELIVERY n≈3450 rpm													
1~ 110 - 220V	3~ 220 - 380V	kW	HP	H (m)													
				Q(m³/h)	0	2.4	4.8	7.2	9.6	12	14.4	16.8	19.2				
		Q(l/min)	0	40	80	120	160	200	240	280	320						
4XRm14/4-1.5	4XR14/4-1.5	1.5	2	36	34	32	30	27	24	21	16	12					
4XRm14/7-2.2	4XR14/7-2.2	2.2	3	63	60	57	52	47	42	36	29	20					
-	4XR14/9-3	3	4	81	77	73	67	61	54	46	37	26					
-	4XR14/12-4	4	5.5	109	103	97	89	81	73	62	49	35					
-	4XR14/16-5.5	5.5	7.5	145	138	130	119	108	97	82	66	46					
-	4XR14/20-7.5	7.5	10	181	172	162	149	135	121	103	82	58					

4XR 9

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm9/3-0.75	4XR9/3-0.75	2"	1¼"/1½"	342	361	346	703	688	3.2	8.7	8.0	11.9	11.2
4XRm9/5-1.1	4XR9/5-1.1	2"	1¼"/1½"	418	401	381	819	799	3.8	10.3	9.8	14.1	13.6
4XRm9/7-1.5	4XR9/7-1.5	2"	1¼"/1½"	495	451	426	946	921	4.4	12.9	11.7	17.3	16.1
4XRm9/11-2.2	4XR9/11-2.2	2"	1¼"/1½"	679	532	492	1211	1171	5.5	17.7	15.7	23.2	21.2
-	4XR9/14-3	2"	1¼"/1½"	793	-	598	-	1391	6.4	-	19.8	-	26.2
-	4XR9/18-4	2"	1¼"/1½"	945	-	673	-	1618	7.6	-	23.7	-	31.3
-	4XR7/22-4	2"	1¼"/1½"	1098	-	776	-	1874	8.8	-	28.0	-	36.8
-	4XR7/27-7.5	2"	1¼"/1½"	1320	-	896	-	2216	10.3	-	34.0	-	44.3

* S = Single phase * T = Three phase



4XR 18

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm18/3-1.5	4XR18/3-1.5	2"	1¼"/1½"	428	451	426	879	854	4.2	12.9	11.7	17.1	15.9
4XRm18/5-2.2	4XR18/5-2.2	2"	1¼"/1½"	565	532	492	1097	1057	5.1	17.7	15.7	22.8	20.8
-	4XR18/7-3	2"	1¼"/1½"	733	-	598	-	1331	6.0	-	19.8	-	25.8
-	4XR18/9-4	2"	1¼"/1½"	870	-	673	-	1543	6.9	-	23.7	-	30.6
-	4XR18/12-5.5	2"	1¼"/1½"	1076	-	776	-	1852	8.2	-	28.0	-	36.2
-	4XR18/14-7.5	2"	1¼"/1½"	1212	-	896	-	2108	9.1	-	34.0	-	43.1

* S = Single phase * T = Three phase



4XR 11

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm11/4-1.1	4XR11/4-1.1	2"	1¼"/1½"	380	401	381	781	761	3.5	10.3	9.8	13.8	13.3
4XRm11/5-1.5	4XR11/5-1.5	2"	1¼"/1½"	416	451	426	867	842	3.8	12.9	11.7	16.7	15.5
4XRm11/8-2.2	4XR11/8-2.2	2"	1¼"/1½"	533	532	492	1065	1025	4.6	17.7	15.7	22.3	20.3
-	4XR11/10-3	2"	1¼"/1½"	609	-	598	-	1207	5.2	-	19.8	-	25.0
-	4XR11/13-4	2"	1¼"/1½"	755	-	673	-	1428	6.1	-	23.7	-	29.8
-	4XR11/17-5.5	2"	1¼"/1½"	907	-	776	-	1683	7.3	-	28.0	-	35.3
-	4XR11/22-7.5	2"	1¼"/1½"	1098	-	896	-	1994	8.8	-	34.0	-	42.8


* S = Single phase * T = Three phase



4XRS 2

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm2/6-0.37	4XRS2/6-0.37	1¼"	1"/1½"	275	314	314	589	589	2.0	6.6	6.6	8.6	8.6
4XRSm2/8-0.55	4XRS2/8-0.55	1¼"	1"/1½"	317	329	329	646	646	2.4	7.2	7.3	9.7	9.7
4XRSm2/11-0.75	4XRS2/11-0.75	1¼"	1"/1½"	380	359	344	739	724	3.1	8.7	8.0	11.8	11.1
4XRSm2/16-1.1	4XRS2/16-1.1	1¼"	1"/1½"	485	399	379	884	864	4.2	10.6	9.8	14.8	14.0
4XRSm2/22-1.5	4XRS2/22-1.5	1¼"	1"/1½"	611	449	414	1060	1025	5.5	12.9	11.2	18.4	16.7
4XRSm2/28-2.2	4XRS2/28-2.2	1¼"	1"/1½"	737	542	502	1279	1239	6.8	17.8	15.6	24.6	22.4
-	4XRS2/36-3	1¼"	1"/1½"	905	-	552	-	1457	8.6	-	18.2	-	26.8

* S = Single phase * T = Three phase



4XR 14

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm14/4-1.5	4XR14/4-1.5	2"	1¼"/1½"	509	492	451	1001	960	4.7	15.7	12.9	20.4	17.6
4XRm14/7-2.2	4XR14/7-2.2	2"	1¼"/1½"	620	532	492	1152	1112	5.5	17.7	15.7	23.2	21.2
-	4XR14/9-3	2"	1¼"/1½"	764	-	598	-	1362	6.2	-	19.8	-	26.0
-	4XR14/12-4	2"	1¼"/1½"	931	-	673	-	1604	7.4	-	23.7	-	31.1
-	4XR14/16-5.5	2"	1¼"/1½"	1155	-	776	-	1931	8.9	-	28.0	-	36.9
-	4XR14/20-7.5	2"	1¼"/1½"	1410	-	896	-	2306	10.4	-	34.0	-	44.4

* S = Single phase * T = Three phase



4XRS 3

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm3/4-0.37	4XRS3/4-0.37	1¼"	1"/1½"	233	314	314	547	547	1.7	6.6	6.6	8.3	8.3
4XRSm3/5-0.55	4XRS3/5-0.55	1¼"	1"/1½"	254	329	329	583	583	1.9	7.3	7.3	9.2	9.2
4XRSm3/7-0.75	4XRS3/7-0.75	1¼"	1"/1½"	296	359	344	655	640	2.4	8.7	8.0	11.1	10.4
4XRSm3/11-1.1	4XRS3/11-1.1	1¼"	1"/1½"	380	399	379	779	759	3.2	10.6	9.8	13.8	13.0
4XRSm3/15-1.5	4XRS3/15-1.5	1¼"	1"/1½"	464	449	414	913	878	4.1	12.9	11.2	17.0	15.3
4XRSm3/21-2.2	4XRS3/21-2.2	1¼"	1"/1½"	590	542	502	1132	1092	5.4	17.8	15.6	23.2	21.0
-	4XRS3/28-3	1¼"	1"/1½"	737	-	552	-	1289	7.0	-	18.2	-	25.2
-	4XRS3/36-4	1¼"	1"/1½"	905	-	622	-	1527	8.7	-	21.4	-	30.1
-	4XRS3/44-5.5	1¼"	1"/1½"	1073	-	718	-	1791	10.5	-	25.5	-	36.0

* S = Single phase * T = Three phase

