



3.5XR 6

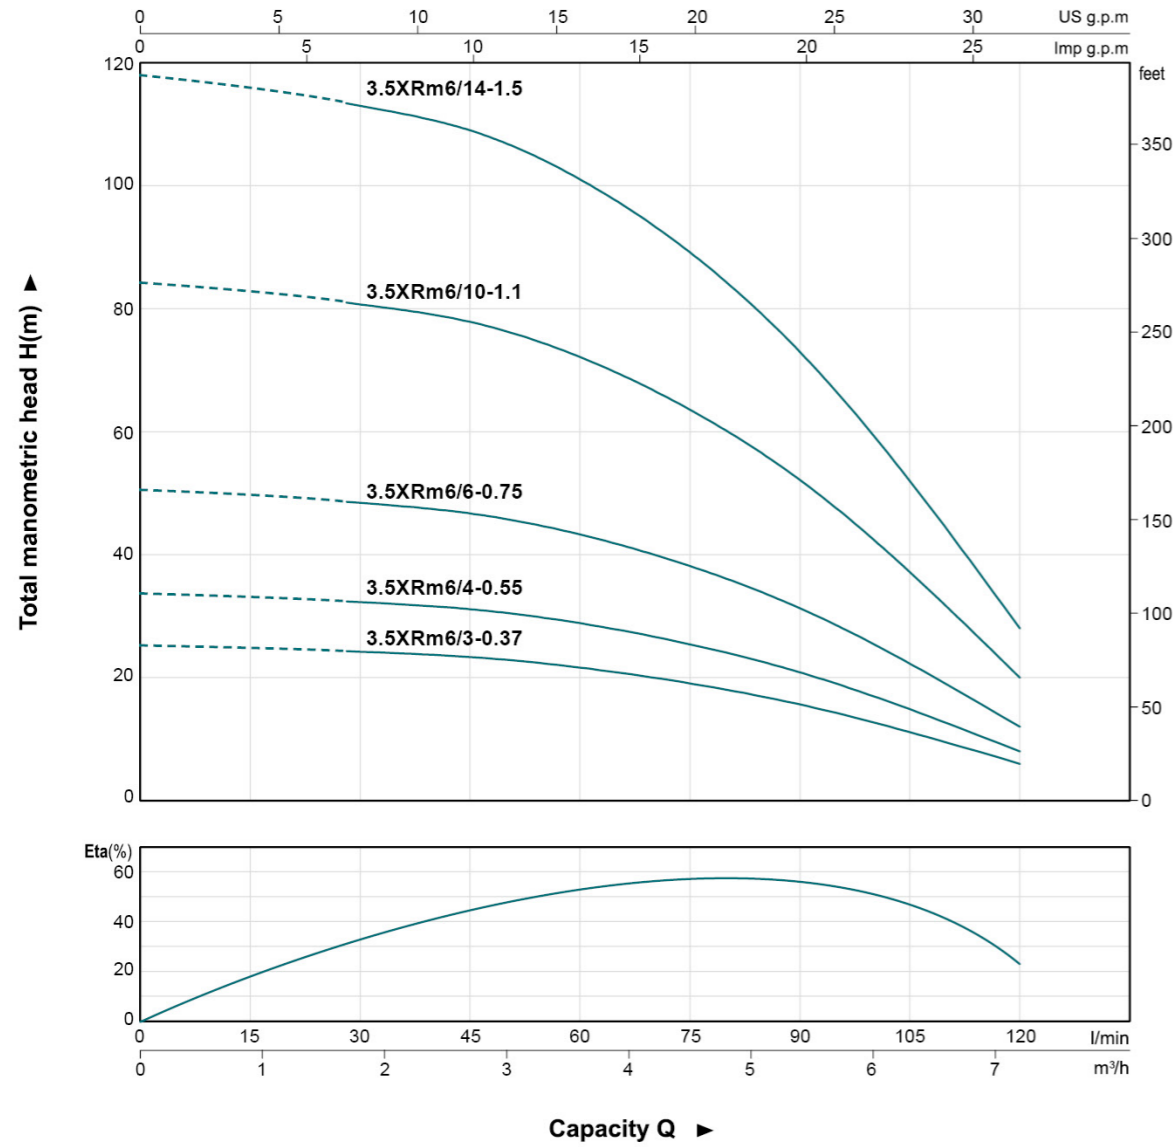

Technical Data

Model	Power		DELIVERY n≈3450 rpm									
	kW	HP	Q(m³/h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2
			Q(l/min)	0	15	30	45	60	75	90	105	120
3.5XRm6/3-0.37	0.35	0.5	H (m)	25	25	24	23	22	19	16	11	6
3.5XRm6/4-0.55	0.55	0.75		34	33	32	31	29	25	21	15	8
3.5XRm6/6-0.75	0.75	1		51	50	48	47	43	38	31	22	12
3.5XRm6/10-1.1	1.1	1.5		84	83	81	78	72	64	52	37	20
3.5XRm6/14-1.5	1.5	2		118	116	113	109	101	89	73	52	28

4XR 3

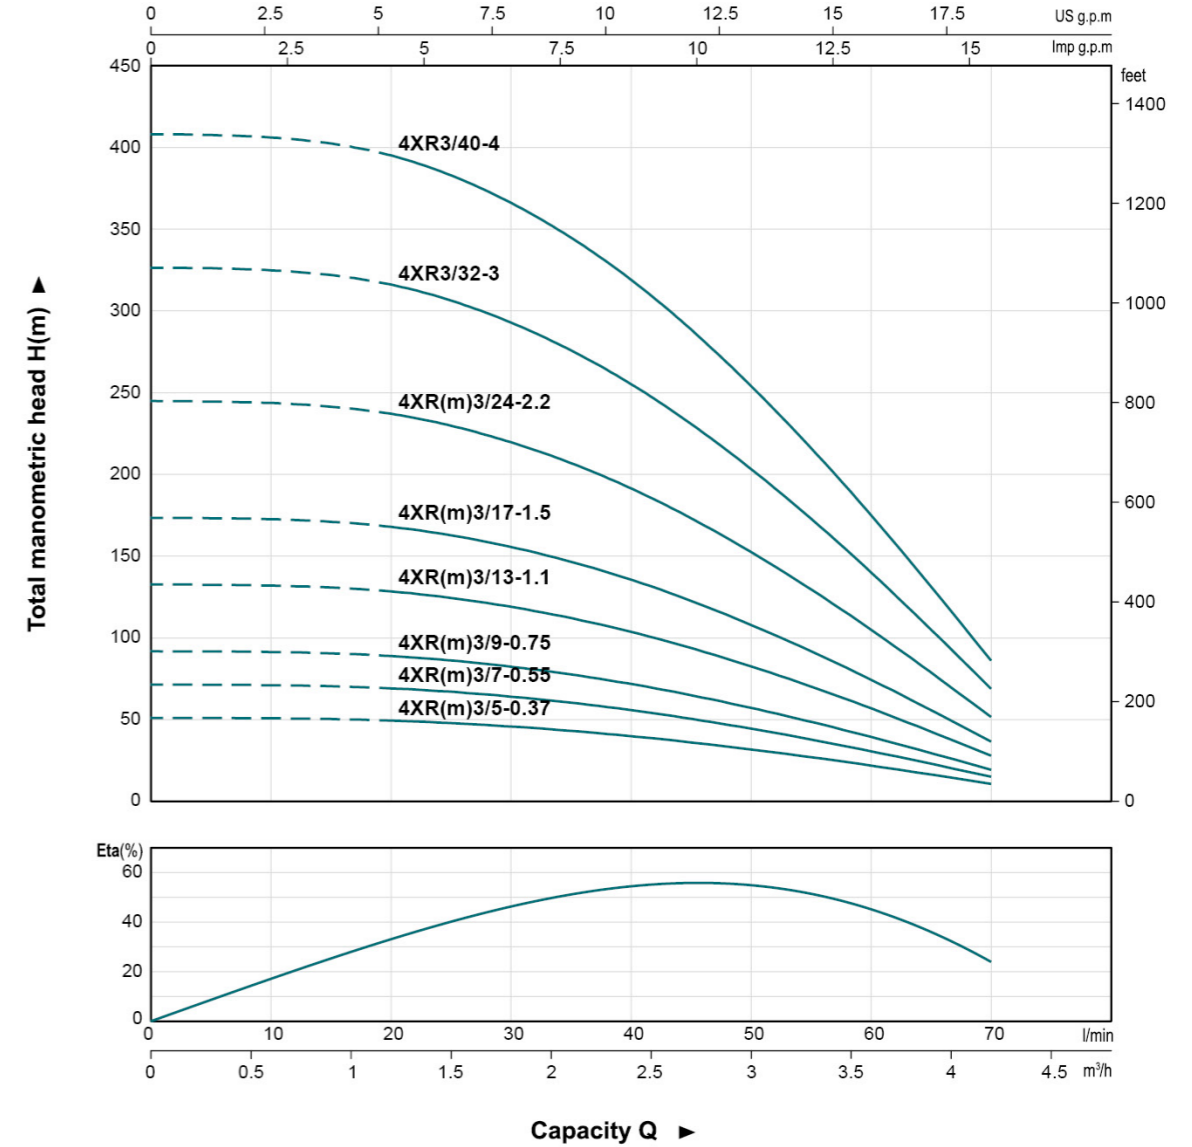

Technical Data

Model		Power		DELIVERY n≈3450 rpm									
1~ 110 - 220V	3~ 220 - 380V	kW	HP	Q(m³/h)	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
				Q(l/min)	0	10	20	30	40	50	60	70	80
	4XRm3/5-0.37	0.37	0.5	H (m)	52	51	51	48	43	38	30	23	12
	4XRm3/7-0.55	0.55	0.75		72	72	71	67	61	53	42	32	17
	4XRm3/9-0.75	0.75	1		93	92	91	86	78	68	54	41	22
	4XRm3/13-1.1	1.1	1.5		135	133	132	124	112	98	78	59	32
	4XRm3/17-1.5	1.5	2		176	174	173	162	147	128	102	76	42
	4XRm3/24-2.2	2.2	3		248	246	244	229	208	181	144	108	59
-	4XR3/32-3	3	4		331	328	325	306	277	242	192	144	78
-	4XR3/40-4	4	5.5		414	410	406	382	346	302	240	180	98

3.5XR 4

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M(s)	T(s)	P	M(s)	T(s)
3.5XRm4/3-0.25	1¼"	1½"	287	303	590	1.6	5.5	7.1
3.5XRm4/4-0.37	1¼"	1½"	314	318	632	1.8	6.1	7.9
3.5XRm4/6-0.55	1¼"	1½"	367	338	705	2.1	6.8	8.9
3.5XRm4/8-0.75	1¼"	1½"	419	363	782	2.4	7.8	10.2
3.5XRm4/12-1.1	1¼"	1½"	524	413	937	3.1	9.9	13.0
3.5XRm4/16-1.5	1¼"	1½"	630	463	1093	3.7	11.8	15.5


* S = Single phase



4XR 4

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm4/4-0.37	4XR4/4-0.37	1¼"	1½"/2"	328	316	316	644	644	2.6	6.7	5.8	9.3	8.4
4XRm4/5-0.55	4XR4/5-0.55	1¼"	1½"/2"	355	331	331	686	686	2.8	7.3	7.3	10.1	10.1
4XRm4/7-0.75	4XR4/7-0.75	1¼"	1½"/2"	409	361	346	770	755	3.4	8.7	8.0	12.1	11.4
4XRm4/10-1.1	4XR4/10-1.1	1¼"	1½"/2"	490	401	381	891	871	4.2	10.3	9.8	14.5	14.0
4XRm4/13-1.5	4XR4/13-1.5	1¼"	1½"/2"	571	451	426	1022	997	5.0	12.9	11.7	17.9	16.7
4XRm4/18-2.2	4XR4/18-2.2	1¼"	1½"/2"	737	532	492	1269	1229	6.2	-	15.7	23.9	21.9
-	4XR4/24-3	1¼"	1½"/2"	898	-	598	-	1496	7.8	-	19.8	-	27.6
-	4XR4/31-4	1¼"	1½"/2"	1086	-	673	-	1759	9.5	-	23.7	-	33.2
-	4XR4/39-5.5	1¼"	1½"/2"	1333	-	776	-	2109	11.6	-	28.0	-	39.6

* S = Single phase * T = Three phase



3.5XR 6

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M(s)	T(s)	P	M(s)	T(s)
3.5XRm6/3-0.37	1¼"	1½"	296	318	614	1.6	6.1	7.7
3.5XRm6/4-0.55	1¼"	1½"	325	338	663	1.8	6.8	8.6
3.5XRm6/6-0.75	1¼"	1½"	383	363	746	2.1	7.8	9.9
3.5XRm6/10-1.1	1¼"	1½"	500	413	913	2.7	9.9	12.6
3.5XRm6/14-1.5	1¼"	1½"	616	463	1079	3.4	11.8	15.2


* S = Single phase



4XR 5

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm5/3-0.37	4XR5/3-0.37	1¼"	1½"/2"	309	316	316	625	625	2.4	6.7	5.8	9.1	8.2
4XRm5/4-0.55	4XR5/4-0.55	1¼"	1½"/2"	338	331	331	669	669	2.6	7.3	7.3	9.9	9.9
4XRm5/6-0.75	4XR5/6-0.75	1¼"	1½"/2"	397	361	346	758	743	3.2	8.7	8.0	11.9	11.2
4XRm5/8-1.1	4XR5/8-1.1	1¼"	1½"/2"	455	401	381	856	836	3.7	10.3	9.8	14.0	13.5
4XRm5/11-1.5	4XR5/11-1.5	1¼"	1½"/2"	543	451	426	994	969	4.5	12.9	11.7	17.4	16.2
4XRm5/16-2.2	4XR5/16-2.2	1¼"	1½"/2"	689	532	492	1221	1181	5.9	17.7	15.7	23.6	21.6
-	4XR5/22-3	1¼"	1½"/2"	898	-	598	-	1496	7.5	-	19.8	-	27.3
-	4XR5/28-4	1¼"	1½"/2"	1071	-	673	-	1744	9.1	-	23.7	-	32.8
-	4XR5/35-5.5	1¼"	1½"/2"	1037	-	776	-	2083	11.0	-	28.0	-	39.0

* S = Single phase * T = Three phase



4XR 3

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm3/5-0.37	4XR3/5-0.37	1¼"	1½"	309	316	316	625	625	2.4	6.7	5.8	9.1	8.2
4XRm3/7-0.55	4XR3/7-0.55	1¼"	1½"	338	331	331	669	669	2.6	7.3	7.3	9.9	9.9
4XRm3/9-0.75	4XR3/9-0.75	1¼"	1½"	397	361	346	758	743	3.2	8.7	8.0	11.9	11.2
4XRm3/13-1.1	4XR3/13-1.1	1¼"	1½"	455	401	381	856	836	3.7	10.3	9.8	14.0	13.5
4XRm3/17-1.5	4XR3/17-1.5	1¼"	1½"	543	451	426	994	969	4.5	12.9	11.7	17.4	16.2
4XRm3/24-2.2	4XR3/24-2.2	1¼"	1½"	689	532	492	1221	1181	5.9	17.7	15.7	23.6	21.6
-	4XR3/32-3	1¼"	1½"	898	-	598	-	1496	7.5	-	19.8	-	27.3
-	4XR3/40-4	1¼"	1½"	1071	-	673	-	1744	9.1	-	23.7	-	32.8

* S = Single phase * T = Three phase



4XR 7

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRm7/3-0.55	4XR7/3-0.55	1¼"	1½"/2"	331	331	331	662	662	3.1	7.3	7.3	10.4	10.4
4XRm7/4-0.75	4XR7/4-0.75	1¼"	1½"/2"	366	361	346	727	712	3.4	8.7	8.0	12.1	11.4
4XRm7/6-1.1	4XR7/6-1.1	1¼"	1½"/2"	435	401	381	836	816	4.0	10.3	9.8	14.3	13.8
4XRm7/9-1.5	4XR7/9-1.5	1¼"	1½"/2"	539	451	426	990	965	4.9	12.9	11.7	17.8	16.6
4XRm7/13-2.2	4XR7/13-2.2	1¼"	1½"/2"	677	532	492	1209	1169	6.0	17.7	15.7	23.7	21.7
-	4XR7/17-3	1¼"	1½"/2"	846	-	598	-	1444	7.1	-	19.8	-	26.9
-	4XR7/22-4	1¼"	1½"/2"	1019	-	673	-	1692	8.5	-	23.7	-	32.2
-	4XR7/28-5.5	1¼"	1½"/2"	1226	-	776	-	2002	10.2	-	28.0	-	38.2
-	4XR4/34-7.5	1¼"	1½"/2"	1463	-	896	-	2359	11.9	-	34.0	-	45.9

* S = Single phase * T = Three phase

