



6XRS 17

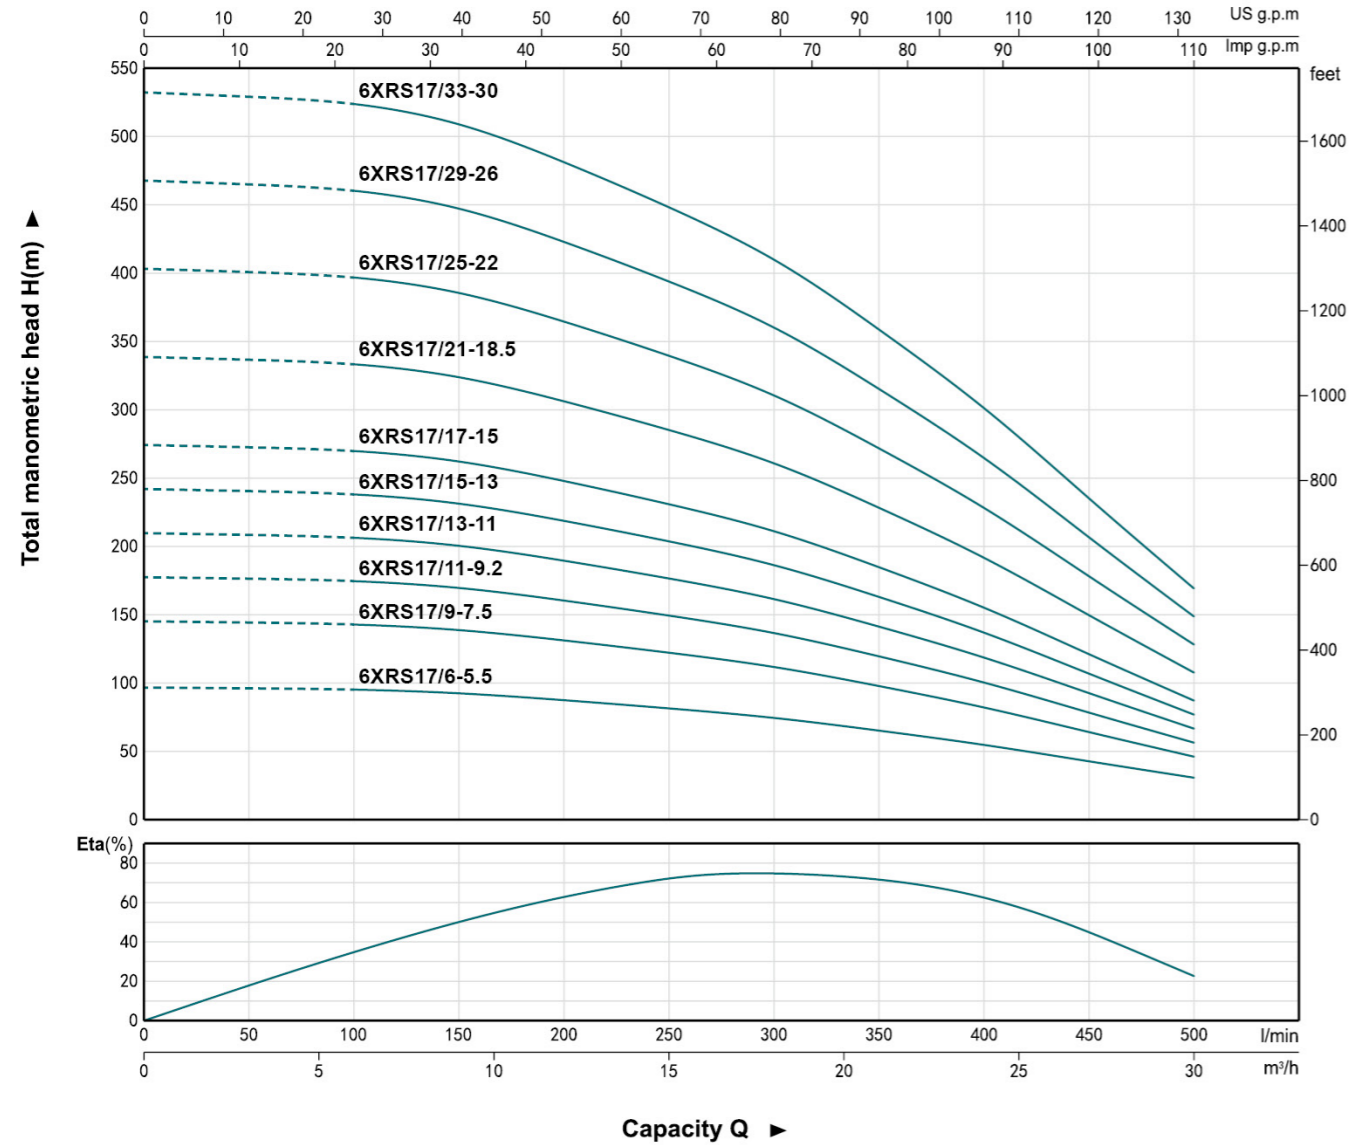

Technical Data

Model	Power		DELIVERY n≈3450 rpm												
	kW	HP	Q(m³/h)	0	3	6	9	12	15	18	21	24	27	30	
			Q(l/min)	0	50	100	150	200	250	300	350	400	450	500	
6XRS17/6-5.5	5.5	7.5	H (m)	97	96	95	93	87	81	75	65	55	43	31	
6XRS17/9-7.5	7.5	10		145	144	143	139	131	122	112	98	82	64	46	
6XRS17/11-9.2	9.2	12.5		177	176	175	170	160	149	137	120	100	78	56	
6XRS17/13-11	11	15		210	208	206	201	189	176	162	141	119	93	67	
6XRS17/15-13	13	17.5		242	240	238	231	219	204	186	163	137	107	77	
6XRS17/17-15	15	20		274	273	270	262	248	231	211	185	155	121	87	
6XRS17/21-18.5	18.5	25		339	337	333	324	306	285	261	228	192	150	108	
6XRS17/25-22	22	30		403	401	397	386	364	339	311	272	228	178	128	
6XRS17/29-26	26	35		468	465	460	447	423	394	360	315	265	207	149	
6XRS17/33-30	30	40		532	529	524	509	481	448	410	359	301	235	169	

6XRS 30

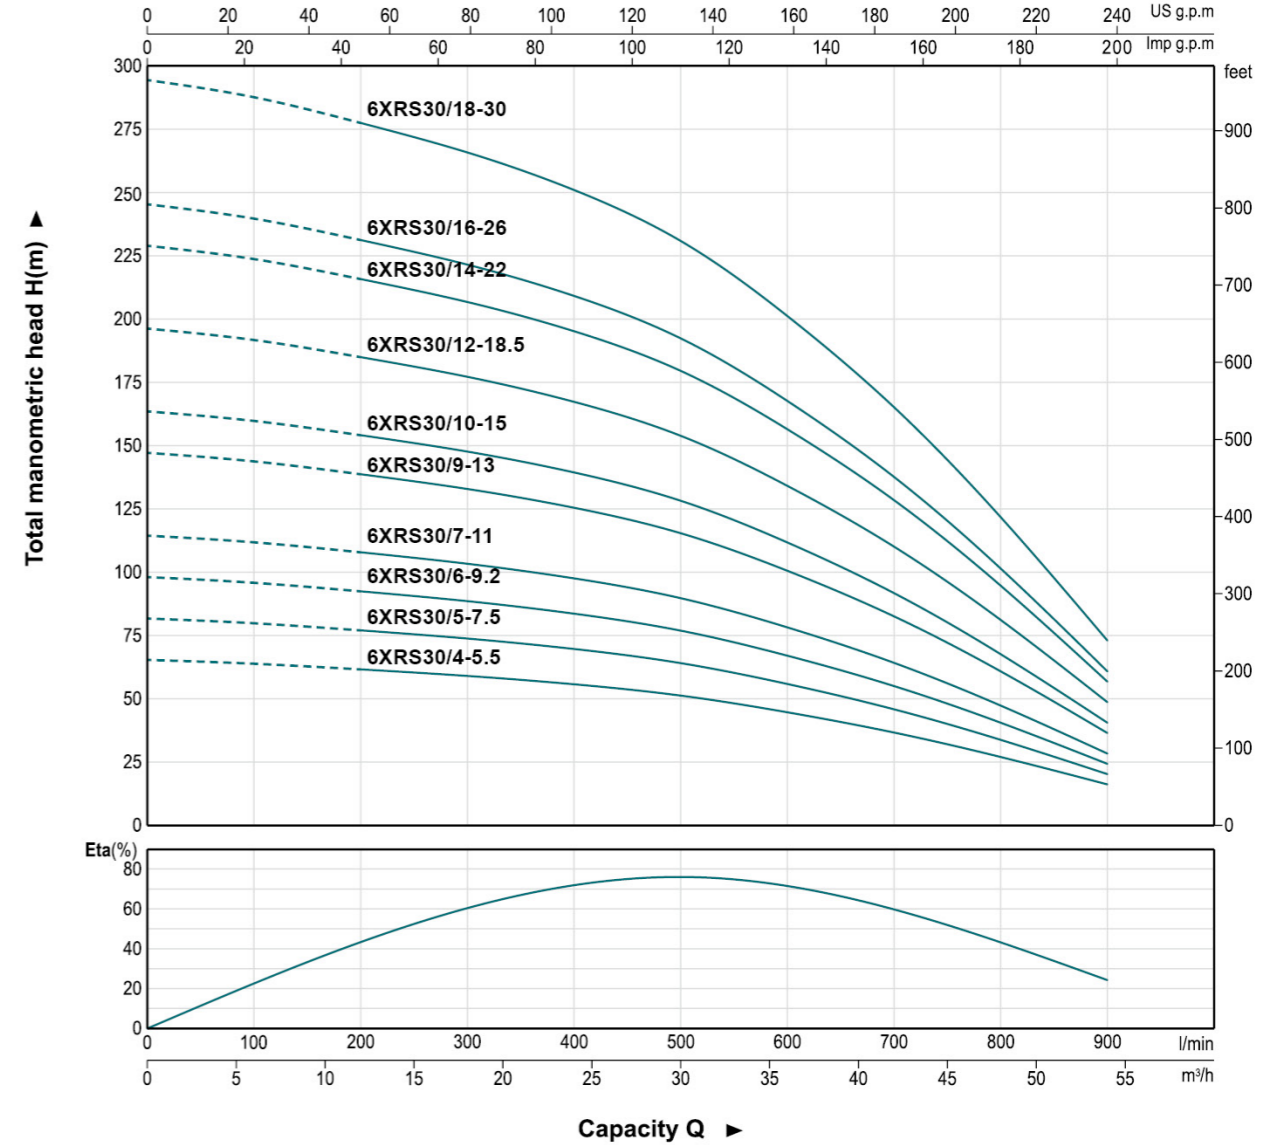


Technical Data

Model	Power		DELIVERY n≈3450 rpm												
	kW	HP	Q(m³/h)	0	6	12	18	24	30	36	42	48	54		
			Q(l/min)	0	100	200	300	400	500	600	700	800	900		
6XRS30/4-5.5	5.5	7.5	H (m)	65	64	62	59	56	51	45	37	27	16		
6XRS30/5-7.5	7.5	10		82	80	77	74	70	64	56	46	34	20		
6XRS30/6-9.2	9.2	12.5		98	96	92	89	84	77	67	55	41	24		
6XRS30/7-11	11	15		114	112	108	103	98	90	78	64	47	28		
6XRS30/9-13	13	17.5		147	144	138	133	125	115	100	82	61	36		
6XRS30/10-15	15	20		163	160	154	148	139	128	112	92	68	41		
6XRS30/12-18.5	18.5	25		196	192	185	177	167	154	134	110	81	49		
6XRS30/14-22	22	30		229	224	215	207	195	180	156	128	95	57		
6XRS30/16-26	26	35		261	256	246	236	223	205	179	147	108	65		
6XRS30/18-30	30	40		294	288	277	266	251	231	201	165	122	73		

4XRS 5

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm5/4-0.55	4XRS5/4-0.55	1¼"	1"1/1½"	233	329	329	562	562	2.2	7.2	7.3	9.5	9.5
4XRSm5/5-0.75	4XRS5/5-0.75	1¼"	1"1/1½"	254	359	344	613	598	2.4	8.7	8.0	11.1	10.4
4XRSm5/7-1.1	4XRS5/7-1.1	1¼"	1"1/1½"	296	399	379	695	675	2.9	10.6	9.8	13.5	12.7
4XRSm5/10-1.5	4XRS5/10-1.5	1¼"	1"1/1½"	359	449	414	808	773	3.5	12.9	11.2	16.4	14.7
4XRSm5/15-2.2	4XRS5/15-2.2	1¼"	1"1/1½"	464	542	502	1006	966	4.6	17.8	15.6	22.4	20.2
-	4XRS5/20-3	1¼"	1"1/1½"	569	-	552	-	1121	5.7	-	18.2	-	23.9
-	4XRS5/25-4	1¼"	1"1/1½"	674	-	622	-	1296	6.8	-	21.4	-	28.2
-	4XRS5/31-5.5	1¼"	1"1/1½"	800	-	718	-	1518	8.1	-	25.5	-	33.6
-	4XRS5/37-7.5	1¼"	1"1/1½"	926	-	828	-	1754	9.5	-	31.0	-	40.5

* S = Single phase * T = Three phase



6XRS 17

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M(τ)	T(τ)	P	M(τ)	T(τ)
6XRS17/6-5.5	3"	4"	632	614	1246	11.3	42.4	53.7
6XRS17/9-7.5	3"	4"	813	654	1467	15.2	46.9	62.1
6XRS17/11-7.2	3"	4"	934	704	1638	17.8	51.9	69.7
6XRS17/13-11	3"	4"	1055	754	1809	20.4	57.5	77.9
6XRS17/15-13	3"	4"	1176	804	1980	23.0	62.4	85.4
6XRS17/17-15	3"	4"	1297	854	2151	25.6	67.9	93.5
6XRS17/21-18.5	3"	4"	1539	934	2473	30.8	82.2	113.0
6XRS17/25-22	3"	4"	1781	1014	2795	36.0	92.7	128.7
6XRS17/29-26	3"	4"	2023	1094	3117	41.2	101.7	142.9
6XRS17/33-30	3"	4"	2265	1174	3439	46.4	110.7	157.1


* T = Three phase



4XRS 8

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm8/3-0.75	4XRS8/3-0.75	2"	1¼"/1½"	281	359	344	640	625	3.7	8.7	8.0	12.4	11.7
4XRSm8/5-1.1	4XRS8/5-1.1	2"	1¼"/1½"	365	399	379	764	744	4.4	10.6	9.8	15.0	14.2
4XRSm8/7-1.5	4XRS8/7-1.5	2"	1¼"/1½"	449	499	414	898	863	5.0	12.9	11.2	17.9	16.2
4XRSm8/9-2.2	4XRS8/9-2.2	2"	1¼"/1½"	533	542	502	1075	1035	5.6	17.8	15.6	23.4	21.2
-	4XRS8/12-3	2"	1¼"/1½"	659	-	552	-	1211	6.7	-	18.2	-	24.9
-	4XRS8/15-4	2"	1¼"/1½"	785	-	622	-	1407	7.7	-	21.4	-	29.1
-	4XRS8/18-5	2"	1¼"/1½"	911	-	678	-	1589	8.6	-	23.6	-	32.2
-	4XRS8/20-5.5	2"	1¼"/1½"	995	-	718	-	1713	9.3	-	25.5	-	34.8
-	4XRS8/26-7.5	2"	1¼"/1½"	1247	-	768	-	2015	11.4	-	28.0	-	39.4


* S = Single phase * T = Three phase



6XRS 30

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M(τ)	T(τ)	P	M(τ)	T(τ)
6XRS30/4-5.5	3"	4"	653	614	1267	10.7	42.4	53.1
6XRS30/5-7.5	3"	4"	749	654	1403	12.5	46.9	59.4
6XRS30/6-9.2	3"	4"	845	704	1549	14.3	51.9	66.2
6XRS30/7-11	3"	4"	941	754	1695	16.1	57.5	73.6
6XRS30/9-13	3"	4"	1133	804	1937	19.7	62.4	82.1
6XRS30/10-15	3"	4"	1229	854	2083	21.5	67.9	89.4
6XRS30/12-18.5	3"	4"	1421	934	2355	25.1	82.2	107.3
6XRS30/14-22	3"	4"	1613	1014	2627	28.7	92.7	121.4
6XRS30/16-26	3"	4"	1805	1094	2899	32.3	101.7	134.0
6XRS30/18-30	3"	4"	1997	1174	3171	35.9	110.7	146.6


* T = Three phase



4XRS 14

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm14/5-2.2	4XRS14/5-2.2	2"	1¼"/1½"	447	542	502	989	949	7.5	17.8	15.6	25.3	23.1
-	4XRS14/6-3	2"	1¼"/1½"	497	-	552	-	1049	7.8	-	18.2	-	26.0
-	4XRS14/8-4	2"	1¼"/1½"	597	-	622	-	1219	8.4	-	21.4	-	29.8
-	4XRS14/10-5.5	2"	1¼"/1½"	697	-	718	-	1415	9.0	-	25.5	-	34.5
-	4XRS14/13-7.5	2"	1¼"/1½"	847	-	828	-	1675	9.9	-	31.0	-	40.9

* S = Single phase * T = Three phase



6XRS 46

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M(τ)	T(τ)	P	M(τ)	T(τ)
6XRS46/3-7.5	3"	4"	612	654	1266	11.0	46.9	57.9
6XRS46/4-9.2	3"	4"	725	704	1429	13.5	51.2	64.7
6XRS46/5-13	3"	4"	838	804	1642	16.0	62.4	78.4
6XRS46/6-15	3"	4"	951	854	1805	18.5	67.9	86.4
6XRS46/7-18.5	3"	4"	1064	934	1998	21.0	82.2	103.2
6XRS46/9-22	3"	4"	1290	1014	2304	26.0	92.7	118.7
6XRS46/11-26	3"	4"	1516	1094	2610	31.0	101.7	132.7
6XRS46/12-30	3"	4"	1629	1174	2803	33.5	110.7	144.2

* T = Three phase

