



6XRS 46

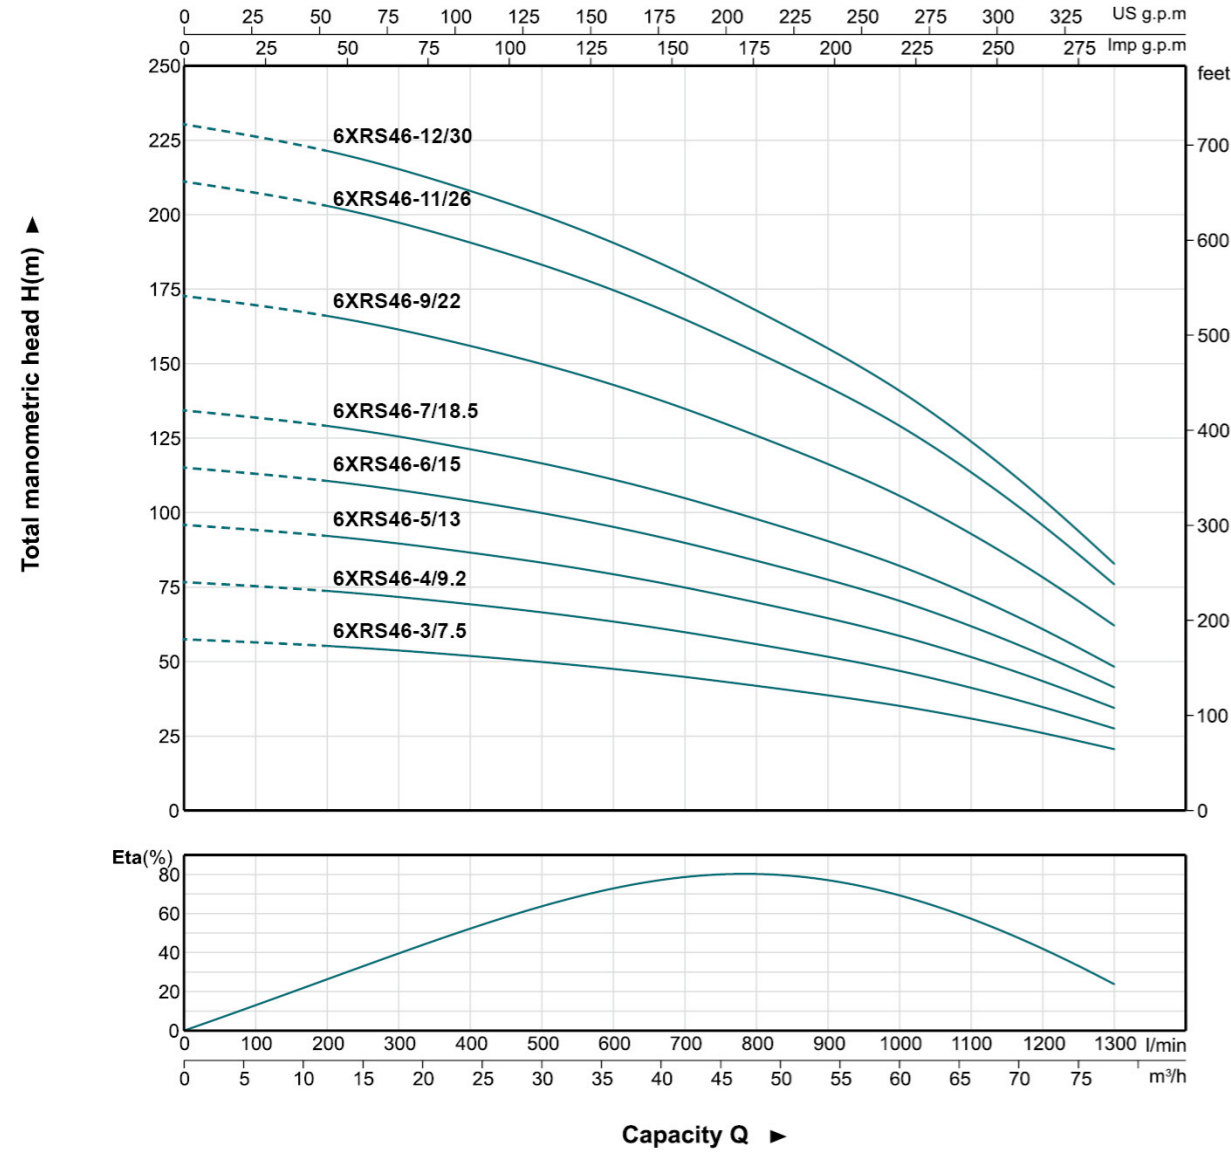

Technical Data

Model	Power		DELIVERY n≈3450 rpm														
	kW	HP	Q(m³/h)	0	6	12	18	24	30	36	42	48	54	60	66	72	78
			Q(l/min)	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300
6XRS46-3/7.5	7.5	10	H (m)	58	56	56	54	52	50	47	44	42	39	35	31	25	20
6XRS46-4/9.2	9.2	12.5	77	75	74	72	69	66	62	59	56	52	47	41	34	27	
6XRS46-5/13	13	17.5	96	94	93	90	86	83	78	74	70	65	59	52	42	34	
6XRS46-6/15	15	20	116	113	111	108	104	99	93	88	83	77	70	62	51	40	
6XRS46-7/18.5	18.5	25	135	131	130	126	121	116	109	103	97	90	82	72	59	47	
6XRS46-9/22	22	30	173	169	167	162	155	149	140	133	125	116	106	93	76	61	
6XRS46-11/26	26	35	212	206	204	198	190	182	171	162	153	142	129	114	93	74	
6XRS46-12/30	30	40	231	225	222	216	207	198	187	177	167	155	141	124	102	81	

6XRS 60

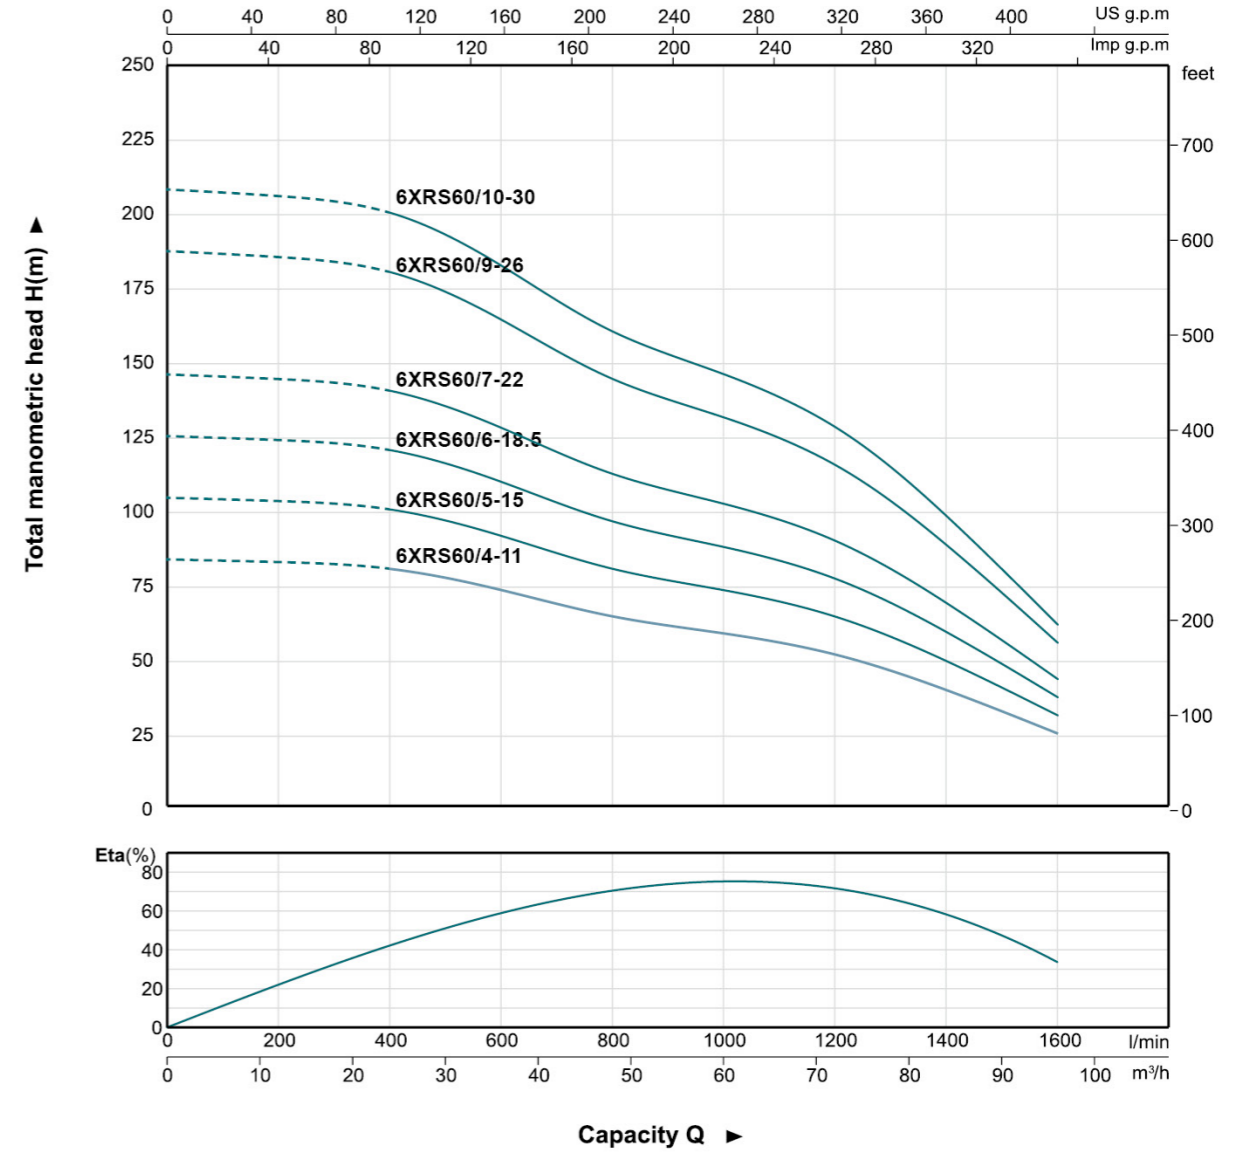


Technical Data

Model	Power		DELIVERY n≈3450 rpm										
	kW	HP	Q(m³/h)	0	12	24	36	48	60	72	84	96	
			Q(l/min)	0	200	400	600	800	1000	1200	1400	1600	
6XRS60/4-11	11	15	H (m)	83	82	80	73	64	58	51	39	24	
6XRS60/5-15	15	20	104	103	100	91	80	73	64	49	30		
6XRS60/6-18.5	18.5	25	125	124	120	109	96	88	77	59	37		
6XRS60/7-22	22	30	146	144	140	127	112	102	90	69	43		
6XRS60/9-26	26	35	187	185	180	164	144	131	115	88	55		
6XRS60/10-30	30	40	208	206	200	182	160	146	128	98	61		

4XRS 5

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm5/4-0.55	4XRS5/4-0.55	1¼"	1"/1½"	233	329	329	562	562	2.2	7.2	7.3	9.5	9.5
4XRSm5/5-0.75	4XRS5/5-0.75	1¼"	1"/1½"	254	359	344	613	598	2.4	8.7	8.0	11.1	10.4
4XRSm5/7-1.1	4XRS5/7-1.1	1¼"	1"/1½"	296	399	379	695	675	2.9	10.6	9.8	13.5	12.7
4XRSm5/10-1.5	4XRS5/10-1.5	1¼"	1"/1½"	359	449	414	808	773	3.5	12.9	11.2	16.4	14.7
4XRSm5/15-2.2	4XRS5/15-2.2	1¼"	1"/1½"	464	542	502	1006	966	4.6	17.8	15.6	22.4	20.2
-	4XRS5/20-3	1¼"	1"/1½"	569	-	552	-	1121	5.7	-	18.2	-	23.9
-	4XRS5/25-4	1¼"	1"/1½"	674	-	622	-	1296	6.8	-	21.4	-	28.2
-	4XRS5/31-5.5	1¼"	1"/1½"	800	-	718	-	1518	8.1	-	25.5	-	33.6
-	4XRS5/37-7.5	1¼"	1"/1½"	926	-	828	-	1754	9.5	-	31.0	-	40.5


* S = Single phase * T = Three phase



6XRS 17

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M((τ))	T((τ))	P	M((τ))	T((τ))
6XRS17/6-5.5	3"	4"	632	614	1246	11.3	42.4	53.7
6XRS17/9-7.5	3"	4"	813	654	1467	15.2	46.9	62.1
6XRS17/11-7.2	3"	4"	934	704	1638	17.8	51.9	69.7
6XRS17/13-11	3"	4"	1055	754	1809	20.4	57.5	77.9
6XRS17/15-13	3"	4"	1176	804	1980	23.0	62.4	85.4
6XRS17/17-15	3"	4"	1297	854	2151	25.6	67.9	93.5
6XRS17/21-18.5	3"	4"	1539	934	2473	30.8	82.2	113.0
6XRS17/25-22	3"	4"	1781	1014	2795	36.0	92.7	128.7
6XRS17/29-26	3"	4"	2023	1094	3117	41.2	101.7	142.9
6XRS17/33-30	3"	4"	2265	1174	3439	46.4	110.7	157.1


* T = Three phase



4XRS 8

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm8/3-0.75	4XRS8/3-0.75	2"	1¼"/1½"	281	359	344	640	625	3.7	8.7	8.0	12.4	11.7
4XRSm8/5-1.1	4XRS8/5-1.1	2"	1¼"/1½"	365	399	379	764	744	4.4	10.6	9.8	15.0	14.2
4XRSm8/7-1.5	4XRS8/7-1.5	2"	1¼"/1½"	449	499	414	898	863	5.0	12.9	11.2	17.9	16.2
4XRSm8/9-2.2	4XRS8/9-2.2	2"	1¼"/1½"	533	542	502	1075	1035	5.6	17.8	15.6	23.4	21.2
-	4XRS8/12-3	2"	1¼"/1½"	659	-	552	-	1211	6.7	-	18.2	-	24.9
-	4XRS8/15-4	2"	1¼"/1½"	785	-	622	-	1407	7.7	-	21.4	-	29.1
-	4XRS8/18-5	2"	1¼"/1½"	911	-	678	-	1589	8.6	-	23.6	-	32.2
-	4XRS8/20-5.5	2"	1¼"/1½"	995	-	718	-	1713	9.3	-	25.5	-	34.8
-	4XRS8/26-7.5	2"	1¼"/1½"	1247	-	768	-	2015	11.4	-	28.0	-	39.4


* S = Single phase * T = Three phase



6XRS 30

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M((τ))	T((τ))	P	M((τ))	T((τ))
6XRS30/4-5.5	3"	4"	653	614	1267	10.7	42.4	53.1
6XRS30/5-7.5	3"	4"	749	654	1403	12.5	46.9	59.4
6XRS30/6-9.2	3"	4"	845	704	1549	14.3	51.9	66.2
6XRS30/7-11	3"	4"	941	754	1695	16.1	57.5	73.6
6XRS30/9-13	3"	4"	1133	804	1937	19.7	62.4	82.1
6XRS30/10-15	3"	4"	1229	854	2083	21.5	67.9	89.4
6XRS30/12-18.5	3"	4"	1421	934	2355	25.1	82.2	107.3
6XRS30/14-22	3"	4"	1613	1014	2627	28.7	92.7	121.4
6XRS30/16-26	3"	4"	1805	1094	2899	32.3	101.7	134.0
6XRS30/18-30	3"	4"	1997	1174	3171	35.9	110.7	146.6


* T = Three phase



4XRS 14

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm14/5-2.2	4XRS14/5-2.2	2"	1¼"/1½"	447	542	502	989	949	7.5	17.8	15.6	25.3	23.1
-	4XRS14/6-3	2"	1¼"/1½"	497	-	552	-	1049	7.8	-	18.2	-	26.0
-	4XRS14/8-4	2"	1¼"/1½"	597	-	622	-	1219	8.4	-	21.4	-	29.8
-	4XRS14/10-5.5	2"	1¼"/1½"	697	-	718	-	1415	9.0	-	25.5	-	34.5
-	4XRS14/13-7.5	2"	1¼"/1½"	847	-	828	-	1675	9.9	-	31.0	-	40.9

* S = Single phase * T = Three phase



6XRS 46

Model	DN		Dimension(mm)			Weight(kg)		
	Standard	Optional	P	M((τ))	T((τ))	P	M((τ))	T((τ))
6XRS46/3-7.5	3"	4"	612	654	1266	11.0	46.9	57.9
6XRS46/4-9.2	3"	4"	725	704	1429	13.5	51.2	64.7
6XRS46/5-13	3"	4"	838	804	1642	16.0	62.4	78.4
6XRS46/6-15	3"	4"	951	854	1805	18.5	67.9	86.4
6XRS46/7-18.5	3"	4"	1064	934	1998	21.0	82.2	103.2
6XRS46/9-22	3"	4"	1290	1014	2304	26.0	92.7	118.7
6XRS46/11-26	3"	4"	1516	1094	2610	31.0	101.7	132.7
6XRS46/12-30	3"	4"	1629	1174	2803	33.5	110.7	144.2

* T = Three phase

